


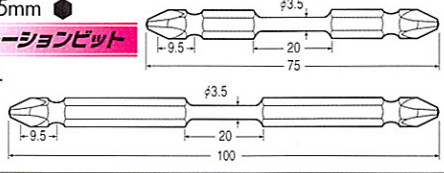






形状	品番	サイズ 刃先×全長 (ℓ)	熱処理区分	内装 (本)	外装 (本)	適用機種	
 H6.35mm						瓜生製 UX-U-UW-ALPHA-UBP-UL-ULT型ドライバ全て。 US-350W-45W-450WB-5W-50W-6W-65SPW-350PW-450PW-5PW-6PW-652PW-50-35PB-5PB-5	
6.35mm ● 	B43	⊕ 1× 75	X.H	10	100	US-LT60P-LT31PB-LT41PB-LT51PB-LT20B-LT30B-17-LT30B-11-LT40B-21-LT40B-15-LT50B-LT30BL-LT40BL-LT30B-LT40B-LT10B 日本ニューマチック製 ND-5LPX-6LFAX-6HPAX-6HSX NPD-50-50S-60-60S-60T-80-80S-80T NPW-450A-DX0-550A-DX0-450EA-DX0-450A-TDX-550A-TDX	
		⊕ 2× 50	X.H.E	10	100		
		75	X.H.G.E	10	100		
		100	X.H.G.E	10	100		
		150	X.H.G.	10	100		
		⊕ 3× 75	X.H.E	10	100	不二空機製 FPW-330SD-1-440D-2-550D-2-660D-3-770D-2-400SD-1-440SD-1-550SD-1-660SD-1 FET-44D-2-55D-2-66D-2 FW-44SD-1-66SD-1-44SAD-1-66SAD-1-44PD-1-66PD-1-44PAD-1-66PAD-1-55XD-7-55XD-8-65XD-6-5PX-6-6PLD-1-6PX-6-6PHD-1-6PMD-1-FD-4-5-4P-5P-4PH-1 FPT-440D-1-1L-550D-1-1L-660D-1-1L-440SD-1-550SD-1-660SD-1	
		⊕ 2× 75	H	10	100		
		100	H	10	100		
		150	H	10	100		
		⊕ 2× 50	S	10	100		
6.35mm ● タッピングビット (B43H) 	B43H					ユタニ製 DH-6PL-6PLE-4.5PEB D-600SHEB-6SP8LE-6WSHPE-8WPPE-5WPEB-6SSBEL-602B-6WSH8B DH-4.5SB-6SEL-6SELB ココタ製 YX-180SA-280SA-380SA-500SA-180A-280A-380A-500A-80A-500CA YEX-150A-501A-150SA-300SA-500SA-100SA-120A YD-400SCA-500SCA-5PHCA-3A-4A-5A-6WAZK-65PZ-65PTZ-650PZ-40PZ-50PZ-4.5PZK-500PZ-600PZ-4.5SZ-4.5LAZ-600SZ Y-40SA-60SA-40A-40A-60A-40TA アトラス・コフコ製 LUMシリーズ-LUFシリーズ-TWISTシリーズ-ELシリーズ-ETBシリーズ-COMBIシリーズ-EPシリーズ 以下の機種は片口ビットのみの適用 ハイオス製 DL-10-20-CL-9000-VZ-4504-4506 デルボ製 DLV-8150-1141-1161-1171-7251-8251-8152-7252-8252 カノン製 N6-N12-N20-N30-N50-N100STDK N6-N12-N20-N30-N50-N100LTDK N10-N20-N50DPSK N10-N20-N50DPSK II 9K-150P 東日製 UB0CN~100CN, ULR120N~ULR500CN, UR500CN, UPS30N~250CN, UPSR30CN~250CN, MG60CN~250CN, MF6N~MF12N, LTD15CN~100CN, RTD15CN~500CN, BMLD15CN~30CN, NTD15CN~100CN, RNTD15CN~500CN, FTD50CN~400CN, FTD20CN-S-400CN2-S, STC50CN~STC400CN, RTD2260CN, 500CN	
		⊕ 2× 75	H	10	100		
		100	H	10	100		
		150	H	10	100		
		⊕ 2× 50	S	10	100		
6.35mm ● トーションビット PAT. 	BT43	⊕ 2X3.5X75	H	10	100		
		100	H	10	100		
 H6.35mm							
6.35mm ● 	B35	⊕ 1× 50	X.H	10	100	Y-40SA-60SA-40A-40A-60A-40TA アトラス・コフコ製 LUMシリーズ-LUFシリーズ-TWISTシリーズ-ELシリーズ-ETBシリーズ-COMBIシリーズ-EPシリーズ 以下の機種は片口ビットのみの適用 ハイオス製 DL-10-20-CL-9000-VZ-4504-4506 デルボ製 DLV-8150-1141-1161-1171-7251-8251-8152-7252-8252 カノン製 N6-N12-N20-N30-N50-N100STDK N6-N12-N20-N30-N50-N100LTDK N10-N20-N50DPSK N10-N20-N50DPSK II 9K-150P 東日製 UB0CN~100CN, ULR120N~ULR500CN, UR500CN, UPS30N~250CN, UPSR30CN~250CN, MG60CN~250CN, MF6N~MF12N, LTD15CN~100CN, RTD15CN~500CN, BMLD15CN~30CN, NTD15CN~100CN, RNTD15CN~500CN, FTD50CN~400CN, FTD20CN-S-400CN2-S, STC50CN~STC400CN, RTD2260CN, 500CN	
			75	X.H	10		100
			⊕ 1X4.5X100	H	10		100
			⊕ 2× 50	X.G	10		100
			75	X.H.G.E	10		100
			100	X.H.G.E	10		100
			150	X.H.G.E	10		100
			⊕ 2X4.5X100	H	10		100
			⊕ 3× 75	X.H.E	10		100
			100	X.H.E	10		100
			150	G	10		100
			⊖ 6× 75	E	10		100
			対辺 2× 75	H	10		100
			100	H	10		100
			2.5× 75	H	10		100
		100	H	10	100		
		3× 75	H	10	100		
		100	H	10	100		
		4× 75	H	10	100		
		100	H	10	100		
		5× 75	G	10	100		
		100	G	10	100		
		6× 75	G	10	100		
		100	G	10	100		
6.35mm ● 	B39	⊕ 2× 40	H	10	100		
		100	H	10	100		
6.35mm ● 	B45	対辺 5.5×75	外径Dφ 10	10	250	Y-40SA-60SA-40A-40A-60A-40TA アトラス・コフコ製 LUMシリーズ-LUFシリーズ-TWISTシリーズ-ELシリーズ-ETBシリーズ-COMBIシリーズ-EPシリーズ 以下の機種は片口ビットのみの適用 ハイオス製 DL-10-20-CL-9000-VZ-4504-4506 デルボ製 DLV-8150-1141-1161-1171-7251-8251-8152-7252-8252 カノン製 N6-N12-N20-N30-N50-N100STDK N6-N12-N20-N30-N50-N100LTDK N10-N20-N50DPSK N10-N20-N50DPSK II 9K-150P 東日製 UB0CN~100CN, ULR120N~ULR500CN, UR500CN, UPS30N~250CN, UPSR30CN~250CN, MG60CN~250CN, MF6N~MF12N, LTD15CN~100CN, RTD15CN~500CN, BMLD15CN~30CN, NTD15CN~100CN, RNTD15CN~500CN, FTD50CN~400CN, FTD20CN-S-400CN2-S, STC50CN~STC400CN, RTD2260CN, 500CN	
			100	10	10		250
			6×100	10	10		200
			7× 75	13	10		200
			100	13	10		150
			8× 75	13	10		200
			100	13	10		150
			150	13	10		100
			10× 75	16	10		150
			100	16	10		100
		150	16	10	100		
		12×100	18	10	100		
		13× 75	19	10	100		
		100	19	10	100		
		14×100	20	10	100		

※タッピングビットは、M4~M5タッピング専用ビットです。刃先に大きなトルクがかかる作業に最適です。●◎発注は、品番・サイズ・熱処理区分・数量をご指示ください。(例) B43 ⊕2×50H 100本